


Front View

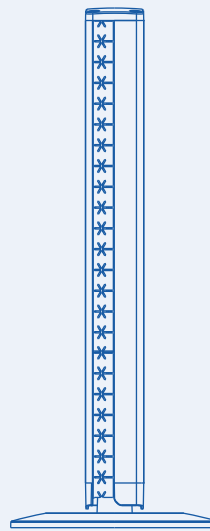

Side View

## E-TUSCAN POWER COLUMN WITH INTEGRATED CABLE MANAGEMENT

### ELECTRICAL

Rated Voltage	250V a.c. Single-phase
Rated Current for Pre-wired	16 Amp maximum - 3 core 1.5mm <sup>2</sup> flexible core cable
Frequency	50Hz / 60Hz
Capacity of Cable Management Compartment	Max. 4 sets of 3 core 1.5mm <sup>2</sup> flexible core cable per channel
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected

### ENVIRONMENTAL

Ambient Operating Temperature	-5°C to +55°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	IP4X
Degree of Pollution	2 (Non-conductive pollution with temporary conductivity caused by condensation)

### MATERIAL

Track	Aluminium
Insulation	Polycarbonate

### SIZE AND WEIGHT (Based On 1 meter Length)

Dimension (Diameter x Length) with Base Plate	Dia 200mm x 500mm or 650mm,
Weight	Est. 2.06 kilograms for 500mm, Est. 2.50 kilograms for 650mm

Guarantee	3 years subject to Eubiq Limited Warranty Statement (Applicable to track ONLY)
-----------	--