


Front View

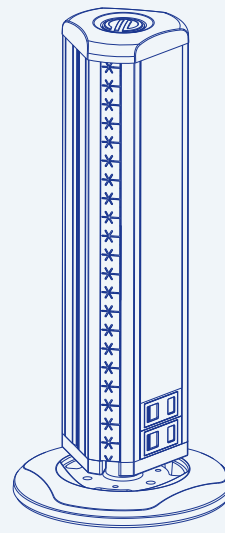

Perspective View

E-TRIGON POWER COLUMN WITH INTEGRATED CABLE MANAGEMENT

ELECTRICAL

Rated Voltage	250V a.c. Single-phase
Rated Current for Pre-wired	13 Amp / 16 Amp maximum - 3 core 1.5mm ² flexible core cable
Frequency	50Hz / 60Hz
Capacity of Cable Management Compartment	Max. 4 sets of 3 core 1.5mm ² flexible core cable per channel
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected

ENVIRONMENTAL

Ambient Operating Temperature	-5°C to +55°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	IP4X
Degree of Pollution	2 (Non-conductive pollution with temporary conductivity caused by condensation)

MATERIAL

Track	Aluminium
Insulation	Polycarbonate

SIZE AND WEIGHT

Dimension (Diameter x Length) with Base Plate	Dia 220mm x 500mm
Weight	Est. 2.5 kilograms

Accessories	DS3 Data Socket Housing
-------------	-------------------------

Guarantee	3 years subject to Eubiq Limited Warranty Statement (Applicable to track ONLY)
-----------	--



www.eubiq.com

EUBIQ PRIVATE LIMITED, 9 JOO KOON CRESCENT SINGAPORE 629025
ALL RIGHTS RESERVED. EUBIQ AND GSS ARE REGISTERED TRADEMARKS OF EUBIQ PTE LTD.

DISCLAIMER: EUBIQ PRIVATE LIMITED RESERVES THE RIGHT TO ALTER ANY DETAILS OF SPECIFICATIONS OR EQUIPMENT WITHOUT PRIOR NOTICE. DETAILS OF SPECIFICATIONS AND EQUIPMENT ARE ALSO SUBJECT TO CHANGES TO SUIT LOCAL STANDARDS, CONDITIONS AND REQUIREMENTS. PLEASE CONSULT YOUR LOCAL DEALER FOR MORE INFORMATION OR LOGON TO EUBIQ WEBSITE.



Front View

SFC3 MODULAR TRACK

ELECTRICAL

Rated Voltage	250V a.c. Single-phase
Rated Current	32 Amp maximum
Frequency	50Hz / 60Hz
Rated Impulse Withstand Voltage	4000V a.c.
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected
Terminal Capacity: Live, Neutral & Earth	1.25 mm ² to 6 mm ²

ENVIRONMENTAL

Ambient Operating Temperature	-5°C to +55°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	IP4X
Degree of Pollution	2 (Non-conductive pollution with temporary conductivity caused by condensation)

MATERIAL

Track	Aluminium
Insulation	Polycarbonate

SIZE AND WEIGHT (Based On 1 meter Length)

Overall Dimension (Width x Depth)	62mm x 26mm
Weight	Estimated 1.2 kilograms
Compliance	IEC EN 61534-1, IEC EN 61534-21 (DEKRA/KEMA tested) DNV Standard for Certification No 2.4 (PSB Tested)
Guarantee	3 years subject to Eubiq Limited Warranty Statement (Applicable to track ONLY)