




Blue LED Indicator

5 Adaptor is now in "ON" position. (Blue LED indicator will illuminate)

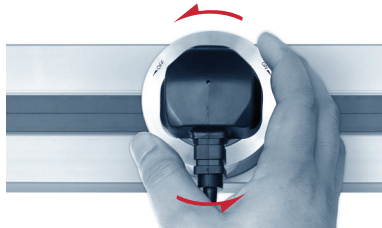

6 To "OFF", turn adaptor anti-clockwise slightly until a "click" sound is heard. To disengage, turn adaptor anti-clockwise fully.

CARE AND MAINTENANCE

The Premium Series Adaptor are products of superior design and craftsmanship and should be treated with care. The following information will help you to protect your warranty coverage.

- The product is specifically manufactured to be used and stored at room temperature (-5°C to +40°C, not exceeding an average of more than 25°C in any 24-hour period).
- Keep the device dry.
- Do not store the product in dirty, dusty areas.
- Do not expose the product to rough handling.
- Do not use harsh chemicals, cleaning solvents or strong detergents to clean the product

www.eubiq.com

TECHNICAL SPECIFICATIONS

			AU3*	BS3*	FR3*	GS3*	IN3*	IS3*	ITA3*	ITL3*	JE3*	CJE3*
Electrical	Rated Voltage	250V a.c.	●	●	●	●	●	●	●	●	●	●
	Rated Current	6Amp										
		10Amp	●						●			●
		13Amp		●							●	
		16Amp			●	●	●	●	●	●		●
Frequency	50Hz / 60Hz	●	●	●	●	●	●	●	●	●	●	
Size and Weight	Diameter x Depth	67 x 38 mm					●	●				
		67 x 43 mm	●	●					●	●	●	●
		67 x 55.5 mm										
		67 x 58 mm			●	●						
	Weight (Estimated)	72grams		●						●	●	
82grams		●		●	●	●	●				●	
85grams												
Environmental	Ambient Operating Temperature	-5°C to +40°C, not exceeding an average of more than 25°C in any 24-hour period										
	Degree of Protection	Ordinary										

Warranty 1 year subject to Eubiq Limited Warranty Statement

* Premium Series Product Descriptions

AU3 Premium Australian Adaptor
BS3 Premium British Adaptor
FR3 Premium France Adaptor
GS3 Premium German Adaptor
IN3 Premium Indian Combo Adaptor

IS3-16 Premium Indian Classic Adaptor
ITA3 Premium Italy Adaptor
ITL3 Premium International Adaptor
JE3 Premium Japan-Euro Adaptor
CJE3 Premium China-Japan-Euro Adaptor

DMK-006-017-03-ENG

PREMIUM SERIES
ADAPTOR

USER GUIDE




 **IMPORTANT SAFETY INFORMATION**

- This user guide contains important product operating instructions, safety and maintenance information.
- Please read the user guide fully before use.




Do not slide adaptor along the track.

-  Keep away from fire.
-  Keep away from water.
-  Not for outdoor use.

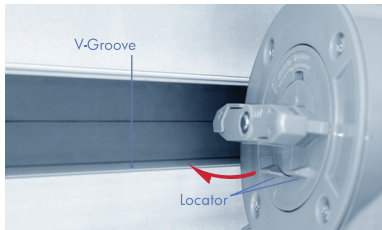


1 Align Locator to V-Groove.
Push adaptor to engage.

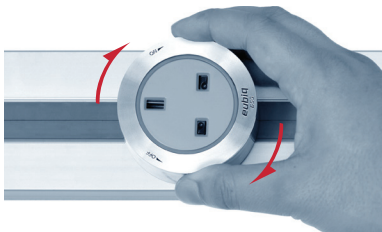

2 Turn adaptor approximately 45° clockwise.
(Adaptor is now in "OFF" mode)



3 Insert plug into adaptor.

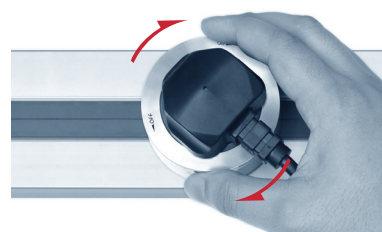

4 To "ON", turn adaptor fully clockwise until a "click" sound is heard.